

TIAGO

Collection

PRODUCT CHARACTERISTICS

- Profile flat

The Rialux siding panels of the **Tiago Collection** are entirely composed of aluminum. The Rialux siding panels stand out due to their light weight properties, rust resistance and installation ease. The panels have a surface that resembles natural wood, which will surely enhance the look of your project.

PRODUCT DETAILS	DIMENSIONS
Length	150 inches
Height covered	6 inches
Thickness - depth	0.43 inches
Weight (per panel)	3.26 lbs
Screw holes	3/4 in x 1/8 in (19mm x 3.2mm)
Screw hole intervals	3 1/4 in (82.5mm)
Calibre	27 thousandth
Panel	1 panel = 6.25 ft ²

PACKAGING	
Quantity per box	18 panels of 150 in (3658mm)
Area covered	112.5 ft ²
Box dimension	151 x 7 x 4.5 inches
Box weight	66 lbs

NOTE

Please refer to the building codes for installation details.

NOTE

Rialux **Tiago Collection** panels are composed of many different shades in every color offered. Therefore, it is extremely important to mix the shades during installation to ensure an even distribution of the different shades throughout the surface. Make sure to validate that the results are satisfying every 3 or 4 rows installed.

INSTALLATION SURFACES

- On wood furring
(16 inches center to center)
- On metal furring
(16 inches center to center)

DIRECTIONS OF INSTALLATION


- Horizontal laying
- Vertical laying
- Diagonal laying

FIXING PROCEDURE

- Screw every 16 inches in the middle of each opening provided for this purpose. Use a 1.25 inches in length screw. See page 4 for screw details.
- Overlap the profile panels of 12.6 lin. ft with the notches on the installation surface.
- When cutting is necessary, it is highly recommended to cut the length of the panels with the appropriate tools suggested by Rialux.

TIAGO

Collection

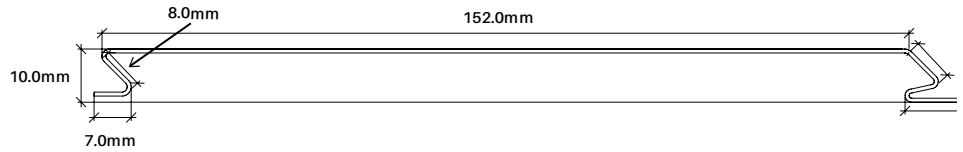

SCREWS

Screw in the middle of each opening provided for this purpose and in a moderate way. It is important not to use pressure towards the bottom or the top while screwing. Make sure that the result is satisfying every 3 or 4 rows installed. To ensure installation quality, remove the protective film from the coating throughout and make corrections if necessary.



TYPE OF SCREW: INOX #8
LENGTH: 1.25 INCHES
HEAD SIZE: #8 - STAR

ASSEMBLY

Join Rialux Aluminum siding panels across their width:
 Joining panels across their width by using clips to cover and protect the screw holes.

Join Rialux Aluminum siding panels across their length:
 Joining panels along their length by superimposing the notches provided for this purpose at the ends of the siding panels.

MATERIAL VERIFICATION

The contents of every box must be inspected upon reception. All material installed constitutes acceptance of product.

MOULDINGS AND ACCESSORIES

Mouldings such as starter trim, drip mouldings, QJ trim and inside / outside corners are available from the Rialux Aluminum Siding manufacturer.


The starter trim must be carefully levelled and installed as an invisible clip at the bottom of the wall behind Rialux panels. The installation of drip moulding is required to divert water around windows and doors.

HANDLING BOXES

Lift each ends of the box, holding it straight at all times. Do not lift the box by the center as it may deform or damage the product.



COULEURS

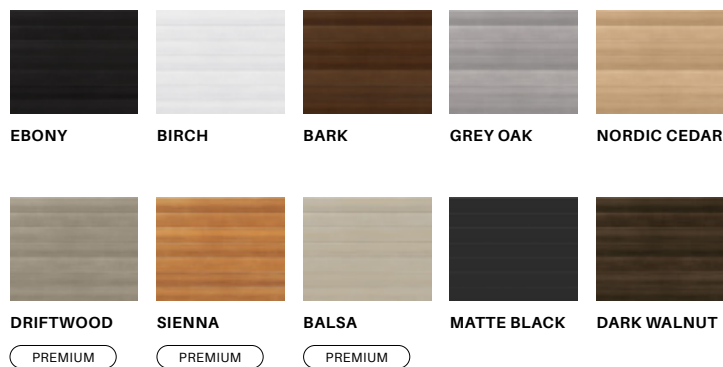

FIRE RESISTANCE

The aluminum siding panels of the Rialux **Tiago Collection** are classified as a zero flammability hazard, according to the NFPA Rating Rating Explanation Guide.