

BOSCO

Collection

PRODUCT CHARACTERISTICS

- Textured profile with channel

The siding panels from Rialux’s **Bosco Collection** are made entirely of aluminum. Rialux aluminum siding panels stand out for their ease of installation, extremely lightweight design, and rust resistance. The product’s texture mimics natural wood, giving your project a striking and elegant look.

PRODUCT DETAILS	DIMENSIONS
Length	150 inches
Height covered	5.45 inches
Thickness - depth	0.45 inches
Weight (per panel)	2 lbs
Screw holes	3/4 in x 1/8 in (19mm x 3.2mm)
Screw hole intervals	3 1/4 in (82.5mm)
Caliber	21 thousandth
Panel	1 panel = 5.68 ft ²

PACKAGING	
Quantity per box	20 panels of 150 in
Area covered per box	113.6 ft ²
Box dimension	152 x 7 3/4 x 4 7/8 inches
Box weight	55 lbs

NOTE

Please refer to the building codes for installation details.

INSTALLATION SURFACES

- On wood furring
(16 inches center to center)
- On metal furring
(16 inches center to center)

DIRECTIONS OF INSTALLATION

- Horizontal laying
- Vertical laying


FIXING PROCEDURE

- Screw every 16 inches in the middle of each opening provided for this purpose. Use stainless steel screws.
- Overlap the profile panels of 12.5 lin. ft with the notches on the installation surface.

CONTINUED ON PAGE 10

BOSCO

Collection

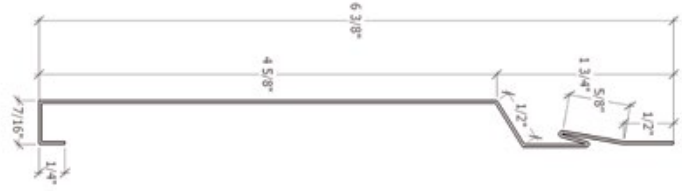

SCREWS

Screw in the middle of each opening provided for this purpose and in a moderate way. It is important not to use pressure towards the bottom or the top while screwing. Make sure that the result is satisfying every 3 or 4 rows installed. To ensure installation quality, remove the protective film from the coating throughout and make corrections if necessary.

ASSEMBLY

Joining Rialux aluminum siding panels along their width: Install using the Clip-Secur system, which covers and protects the screw zones.

Joining Rialux aluminum siding panels along their length: Overlap the notched ends at the extremities of the Rialux aluminum siding panels.

MOULDINGS AND ACCESSORIES

The aluminum siding manufacturer Rialux also offers Starter strip, Drip cap, J-Trim, as well as interior and exterior corners.

Carefully install the starter strip as a hidden fastener at the base of the walls behind the Rialux profiles. A drip cap is required to divert water around windows and doors.

COLORS



ALPINE WHITE TERRA BROWN PEBBLE GREY ABSOLUTE BLACK DUNE BEIGE

MATERIAL VERIFICATION

The contents of every box must be inspected upon reception. All material installed constitutes acceptance of product.


HANDLING BOXES

Always lift from both ends and keep the box straight at all times. Do not lift from the middle to avoid damaging or warping the product.



FIRE RESISTANCE

The aluminum siding panels of the Rialux **Bosco Collection** are classified as a zero flammability hazard, according to the NFPA Rating Explanation Guide.

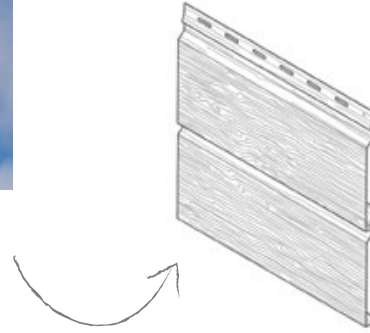

BOSCO FORTE

Collection

PRODUCT CHARACTERISTICS

- Textured profile with channel

The siding panels from Rialux's **Bosco Forte Collection** are made entirely of aluminum. Rialux aluminum siding panels stand out for their ease of installation, extremely lightweight design, and rust resistance. The product's texture mimics natural wood, giving your project a striking and elegant look.

PRODUCT DETAILS	DIMENSIONS
Length	150 inches
Height covered	5.45 inches
Thickness - depth	0.45 inches
Weight (per panel)	2 lbs
Screw holes	3/4 in x 1/8 in (19mm x 3.2mm)
Screw hole intervals	3 1/4 in (82.5mm)
Caliber	21 thousandth
Panel	1 panel = 5.68 ft ²

PACKAGING	
Quantity per box	20 panels of 150 in
Area covered per box	113.6 ft ²
Box dimension	152 x 7 3/4 x 4 7/8 inches
Box weight	55 lbs

NOTE

Please refer to the building codes for installation details.

INSTALLATION SURFACES

- On wood furring
(16 inches center to center)
- On metal furring
(16 inches center to center)

DIRECTIONS OF INSTALLATION

- Horizontal laying
- Vertical laying


FIXING PROCEDURE

- Screw every 16 inches in the middle of each opening provided for this purpose. Use stainless steel screws.
- Overlap the profile panels of 12.5 lin. ft with the notches on the installation surface.

CONTINUED ON PAGE 12

BOSCO FORTE

Collection

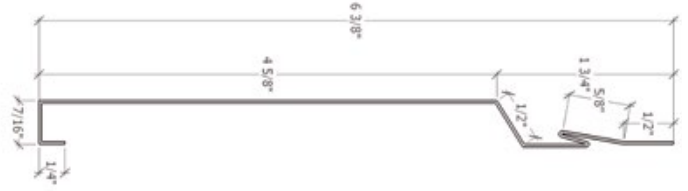

SCREWS

Screw in the middle of each opening provided for this purpose and in a moderate way. It is important not to use pressure towards the bottom or the top while screwing. Make sure that the result is satisfying every 3 or 4 rows installed. To ensure installation quality, remove the protective film from the coating throughout and make corrections if necessary.

ASSEMBLY

Joining Rialux aluminum siding panels along their width: Install using the Clip-Secur system, which covers and protects the screw zones.


Joining Rialux aluminum siding panels along their length: Overlap the notched ends at the extremities of the Rialux aluminum siding panels.

MOULDINGS AND ACCESSORIES

The aluminum siding manufacturer Rialux also offers Starter strip, Drip cap, J-Trim, as well as interior and exterior corners.

Carefully install the starter strip as a hidden fastener at the base of the walls behind the Rialux profiles. A drip cap is required to divert water around windows and doors.

COLORS



ALPINE WHITE TERRA BROWN PEBBLE GREY ABSOLUTE BLACK DUNE BEIGE

MATERIAL VERIFICATION

The contents of every box must be inspected upon reception. All material installed constitutes acceptance of product.

HANDLING BOXES

Always lift from both ends and keep the box straight at all times. Do not lift from the middle to avoid damaging or warping the product.



FIRE RESISTANCE

The aluminum siding panels of the Rialux **Bosco Forte Collection** are classified as a zero flammability hazard, according to the NFPA Rating Rating Explanation Guide.