


TIAGO

Collection

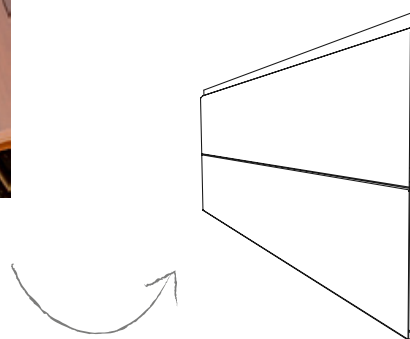

PRODUCT CHARACTERISTICS

- Flat profile

The Rialux siding panels of the **Tiago Collection** are entirely composed of aluminum. The Rialux siding panels stand out due to their light weight properties, rust resistance and installation ease. The panels have a surface that resembles natural wood, which will surely enhance the look of your project.

PRODUCT DETAILS	DIMENSIONS
Length	150 inches
Height covered	6 inches
Thickness - depth	0.43 inches
Weight (per panel)	3.33 lbs
Screw holes	3/4 in x 1/8 in (19mm x 3.2mm)
Screw hole intervals	3 1/4 in (82.5mm)
Caliber	27 thousandth
Panel	1 panel = 6.25 ft ²

PACKAGING

Quantity per box	18 panels of 150 in
Area covered per box	112.5 ft ²
Box dimension	152 x 7 3/4 x 4 7/8 inches
Box weight	60 lbs

NOTE

Please refer to the building codes for installation details.

MIXING THE SHADES

Rialux **Tiago Collection** panels are composed of many different shades in every color offered. Therefore, it is extremely important to mix the shades during installation to ensure an even distribution of the different shades throughout the surface. Make sure to validate that the results are satisfying every 3 or 4 rows installed.

INSTALLATION SURFACES

- On wood furring
(16 inches center to center)
- On metal furring
(16 inches center to center)

DIRECTIONS OF INSTALLATION

- Horizontal laying
- Vertical laying


FIXING PROCEDURE

- Screw every 16 inches in the middle of each opening provided for this purpose. Use stainless steel screws.
- Overlap the profile panels of 12.5 lin. ft with the notches on the installation surface.

CONTINUED ON PAGE 4

TIAGO

Collection

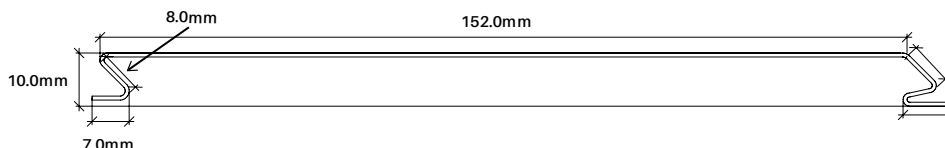

SCREWS

Screw in the middle of each opening provided for this purpose and in a moderate way. It is important not to use pressure towards the bottom or the top while screwing. Make sure that the result is satisfying every 3 or 4 rows installed. To ensure installation quality, remove the protective film from the coating throughout and make corrections if necessary.

ASSEMBLY

Joining Rialux aluminum siding panels along their width: Install using the Clip-Secur system, which covers and protects the screw zones.

Joining Rialux aluminum siding panels along their length: Overlap the notched ends at the extremities of the Rialux aluminum siding panels.

MOULDINGS AND ACCESSORIES

The aluminum siding manufacturer Rialux also offers Starter strip, Drip cap, J-Trim, as well as interior and exterior corners.

Carefully install the starter strip as a hidden fastener at the base of the walls behind the Rialux profiles. A drip cap is required to divert water around windows and doors.

COLORS



BARK BIRCH EBONY SIENNA GREY OAK



DRIFTWOOD DARK WALNUT NORDIC CEDAR MATTE BLACK BALSA*

*THE BALSA COLOR IS AVAILABLE WHILE SUPPLIES LAST.

MATERIAL VERIFICATION

The contents of every box must be inspected upon reception. All material installed constitutes acceptance of product.

HANDLING BOXES

Always lift from both ends and keep the box straight at all times. Do not lift from the middle to avoid damaging or warping the product.



FIRE RESISTANCE

The aluminum siding panels of the Rialux **Tiago Collection** are classified as a zero flammability hazard, according to the NFPA Rating Explanation Guide.