




# TIMBERLAND

## Collection

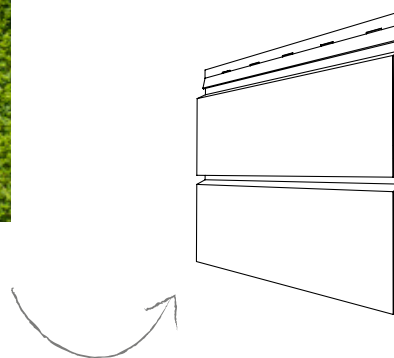

### PRODUCT CHARACTERISTICS

- Profile with channel

The Rialux siding panels of the **Timberland Collection** are entirely composed of aluminum. The Rialux siding panels stand out due to their light weight properties, rust resistance and installation ease. The panels have a surface that resembles natural wood, which will surely enhance the look of your project.

| PRODUCT DETAILS      | DIMENSIONS                     |
|----------------------|--------------------------------|
| Length               | 150 inches                     |
| Height covered       | 5.45 inches                    |
| Thickness - depth    | 0.45 inches                    |
| Weight (per panel)   | 3.30 lbs                       |
| Screw holes          | 3/4 in x 1/8 in (19mm x 3.2mm) |
| Screw hole intervals | 3 1/4 in (82.5mm)              |
| Caliber              | 27 thousandth                  |
| Panel                | 1 panel = 5.68 ft <sup>2</sup> |

### PACKAGING

|                      |                            |
|----------------------|----------------------------|
| Quantity per box     | 20 panels of 150 in        |
| Area covered per box | 113.6 ft <sup>2</sup>      |
| Box dimension        | 152 x 7 3/4 x 4 7/8 inches |
| Box weight           | 66 lbs                     |

### NOTE

Please refer to the building codes for installation details.

### MIXING THE SHADES

Rialux **Timberland Collection** panels are composed of many different shades in every color offered. Therefore, it is extremely important to mix the shades during installation to ensure an even distribution of the different shades throughout the surface. Make sure to validate that the results are satisfying every 3 or 4 rows installed.

### INSTALLATION SURFACES

- On wood furring  
(16 inches center to center)
- On metal furring  
(16 inches center to center)

### DIRECTIONS OF INSTALLATION

- Horizontal laying
- Vertical laying


### FIXING PROCEDURE

- Screw every 16 inches in the middle of each opening provided for this purpose. Use stainless steel screws.
- Overlap the profile panels of 12.5 lin. ft with the notches on the installation surface.

CONTINUED ON PAGE 6

# TIMBERLAND

## Collection

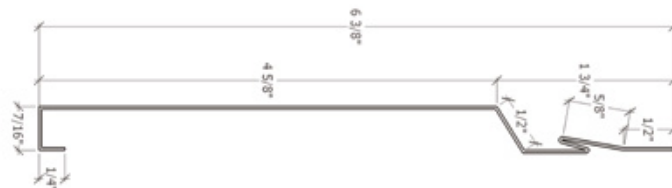

### SCREWS

Screw in the middle of each opening provided for this purpose and in a moderate way. It is important not to use pressure towards the bottom or the top while screwing. Make sure that the result is satisfying every 3 or 4 rows installed. To ensure installation quality, remove the protective film from the coating throughout and make corrections if necessary.

### ASSEMBLY

Joining Rialux aluminum siding panels along their width: Install using the Clip-Secur system, which covers and protects the screw zones.

Joining Rialux aluminum siding panels along their length: Overlap the notched ends at the extremities of the Rialux aluminum siding panels.

### MOULDINGS AND ACCESSORIES

The aluminum siding manufacturer Rialux also offers Starter strip, Drip cap, J-Trim, as well as interior and exterior corners.

Carefully install the starter strip as a hidden fastener at the base of the walls behind the Rialux profiles. A drip cap is required to divert water around windows and doors.

### COLORS



BARK

BIRCH

EBONY

SIENNA

GREY OAK

DRIFTWOOD

DARK WALNUT

NORDIC CEDAR

MATTE BLACK

BALSA\*

\*THE BALSA COLOR IS AVAILABLE WHILE SUPPLIES LAST.

### MATERIAL VERIFICATION

The contents of every box must be inspected upon reception. All material installed constitutes acceptance of product.

### HANDLING BOXES

Always lift from both ends and keep the box straight at all times. Do not lift from the middle to avoid damaging or warping the product.



### FIRE RESISTANCE

The aluminum siding panels of the Rialux **Timberland Collection** are classified as a zero flammability hazard, according to the NFPA Rating Rating Explanation Guide.